

RUBBERTOUGH® 360

HEAVY-DUTY DELINEATORS



OVERVIEW

RubberTough® 360 delineator products are composed of a durable two-piece omni-directional hinge and feature a large 3-1/2" post diameter.

Having been successfully tested to withstand multiple vehicle bumper impacts and wheel-overs, they are ideal for areas that need an imposing *must-be-seen* presence, yet rebound to vertical when hit. The omni-directional hinge utilizes proven Dura-Post® material technology combined with a heavy-duty inner tube to achieve the strong yet flexible design required to rebound larger, heavy posts and signage. Multiple mounting options are available including bolt-down surface mount, portable mat with quick connect pins, and quick-change soil anchors.


FEATURES AND BENEFITS

- ▶ Rebounds when impacted from any direction.
- ▶ FHWA accepted.
- ▶ Superior stability & reboundability.
- ▶ Reliable galvanized steel bases and anchors have no plastic parts.
- ▶ Heavy Duty thick 3-1/2" diameter sign post.
- ▶ Two-piece soil anchor for quick post replacement.
- ▶ Corrosion and UV resistant.
- ▶ Multiple mounting methods available.
- ▶ Easy to store. Detachable portable base stacks for efficient storage.
- ▶ Assembles and dismantles in seconds with quick-connect pins.
- ▶ Remains in service after multiple impacts.
- ▶ Serviceable hinge.
- ▶ Withstands extreme weather conditions.
- ▶ No sandbags required for ballast.



WWW.SAFE-HIT.COM

HEAVY DUTY DELINEATION & INDICATION

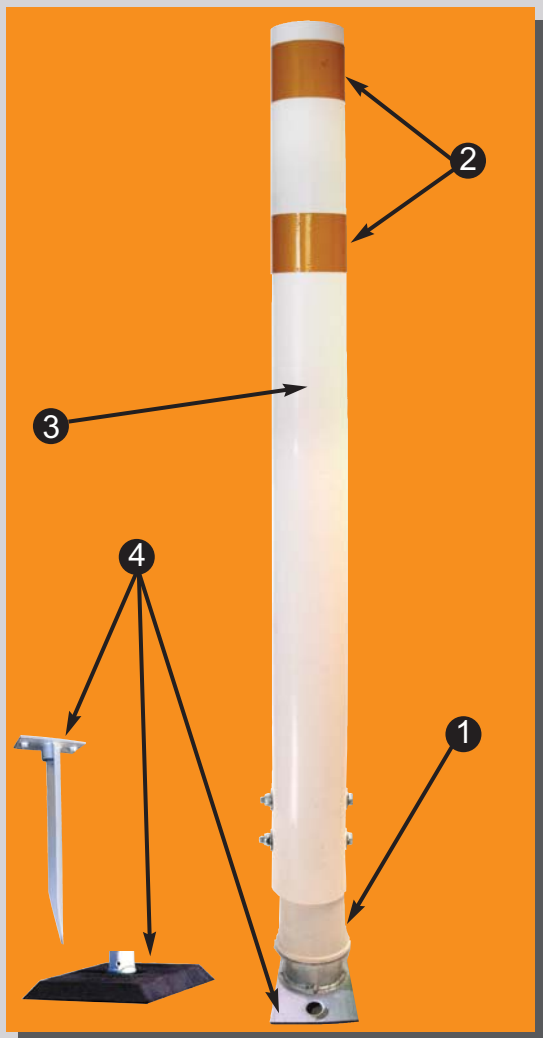

- 1 INNOVATIVE OMNI-DIRECTIONAL HINGE WITHSTANDS IMPACTS FROM ALL DIRECTIONS
- 2 MULTIPLE REFLECTIVE OPTIONS / CONFIGURATIONS
- 3 HEAVY DUTY 3-1/2" DIAMETER POST
- 4 MULTIPLE MOUNTING OPTIONS

SPECIFICATIONS

SIGN POST

Standard Color	White (other colors available)
Post Height	24" - 60"
Post Diameter	3-1/2"
Hinge	Omni-directional polymeric material with steel attachment hardware
Post Material	Colorfast, UV resistant thermoplastic
Hardware	Zinc plated fasteners

REFLECTIVES

Reflective	High intensity ASTM Type III, IV, IX, X
Configurations	Single or multiple wraps and vertical strips
Decals	Many in stock and custom decals available

SURFACE MOUNT PERM. BASE

Material	Galvanized steel
Hardware	Self-tapping masonry screws



QUICK-CHANGE SOIL ANCHOR

Material	Galvanized steel
Hardware	1/2" bolts
Driving tools	Standard Safe-Hit driving tools



QUICK-CONNECT PORTABLE MAT

Material	Recycled crumb rubber
Dimensions	34" x 15" x 2-1/8"
Weight	38 lbs
Hardware	Quick-connect locking pins



SAFE-HIT®



A Division of
ENERGY ABSORPTION
SYSTEMS, INC.

A Quixote Company

WWW.SAFE-HIT.COM

35 East Wacker Drive • Chicago, IL 60601
Tel: (800) 537-8958 • Fax: (800) 770-6755
www.quixtrans.com

Distributed By:

General specifications for RuberTough 360 products are subject to change without notice to reflect improvements and upgrades. Additional information is available in the product manual for this system. Contact Safe-Hit for details.