



Dura-Post[®]

Delineator

Extreme Durability, Long Life Delineator

The Dura-Post Delineator is designed to take abuse. It is tested to withstand over 200 impacts at 60 mph!

The highly visible Dura-Post is safer because it is more likely to be there when you need it. The Dura-Post Delineator can withstand multiple impacts at any angle and return to an upright position. The Dura-Post Delineator has been tested to withstand over 200 impacts at 97 km/h (60 mph). Installation is easy using quick-set epoxy to hold the base to the road. A soil anchored version is also available.

- **Extremely impact resistant.**
- **360° full visibility.**
- **Ultraviolet resistant.**
- **Patented tapered wall design.**
- **Meets MUTCD.**
- **No protruding metal parts.**
- **One piece post construction.**
- **Withstands extreme temperatures -20° - 60° C (0° - 140° F).**
- **Easy installation.**



Available In A Variety of Colors

Standard post colors

Yellow, White, Orange

Custom post colors

Blue, Green, Brown, Black, Red, Grey

High-intensity reflective sheeting

Silver, Amber, Orange Blue, Green, Red

Standard base color

Black

Custom base colors available






Safety And Convenience To Fit All Applications

The Dura-Post Delineator can be used as a channelizing device in many applications, including:

- Traffic Islands
- Dangerous Curves
- Work Zones
- Highway Railroad Intersections
- Parking Lots / Rental Facilities
- Airports
- Gore Areas
- Drive Thru's

The Dura-Post Delineator meets the requirements of NCHRP 350, Category 1 Device.

The Dura-Post Delineator has been NTPEP tested and meets MUTCD Millennium edition, section 6F.55 requirements for channelizing devices.

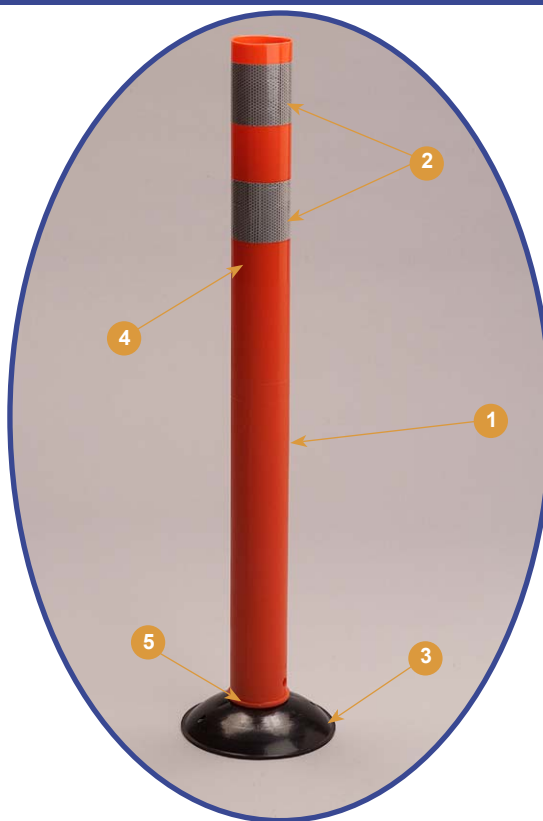

Diagram

- 1 INJECTION MOLDED URETHANE PLASTIC POST for flexibility in extreme temperatures
- 2 REFLECTIVE SHEETING uses high-intensity retro-reflective sheeting
- 3 SURFACE MOUNT BASE made of 50% recycled material
- 4 PATENTED TAPERED WALL DESIGN the key to extreme durability
- 5 PIN-LOCK CONNECTION for quick and easy maintenance

Dura-Post Delineator Specifications

The following are general specifications for the standard Dura-Post Delineator.

Overall Height*	91.44 cm (36 in.)
Post Diameter	7.62 cm (3 in.)
Base Diameter	20.05 cm (8 in.)
Recycled Content	Post may have up to a 25% post industrial regrind Base may have up to 50% post industrial or consumer regrind
Reflective Sheeting Colors	Silver, Amber, Orange, Green, Red, Blue
Post Weight	0.95 kg (2.11 lb.)
Base Weight	0.40 kg (0.91 lb.)

*Posts can be cut to custom lengths under 91.44 cm (36in.).



35 East Wacker Drive, Suite 1100
Chicago, Illinois 60601-2076
Ph: (888) 537-8958 Fax: (800) 770-6755
www.safehit.com

Distributed by: